




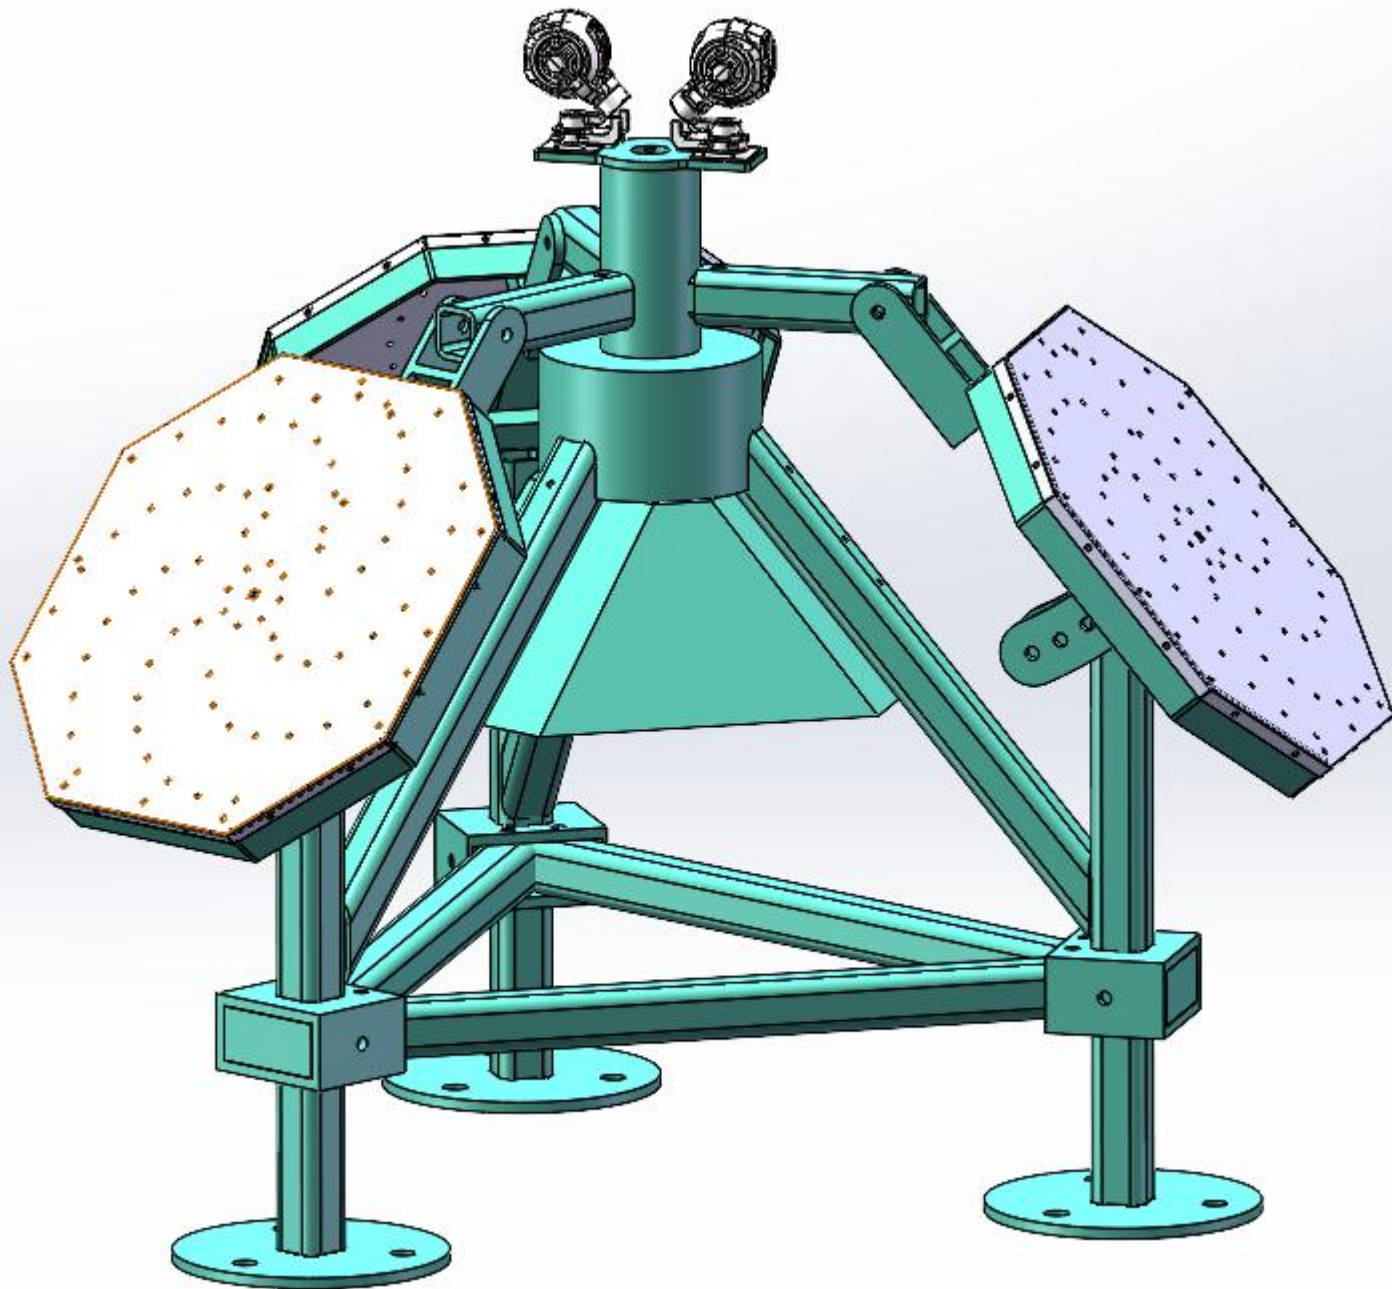


3阵列固定支架安装说明书


3 Array Fixture Installation
Instructions

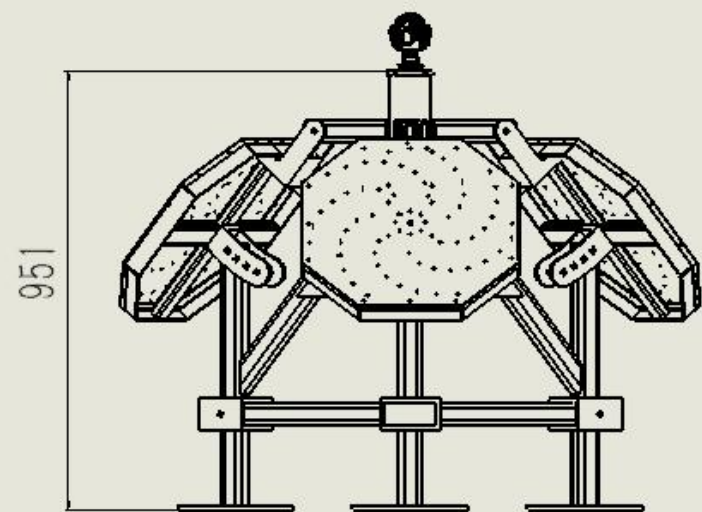

120°

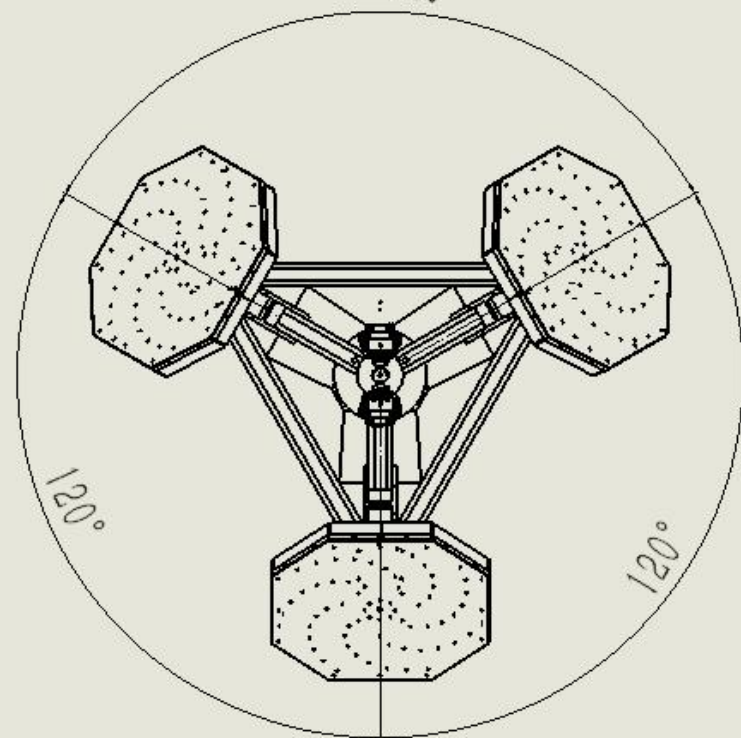
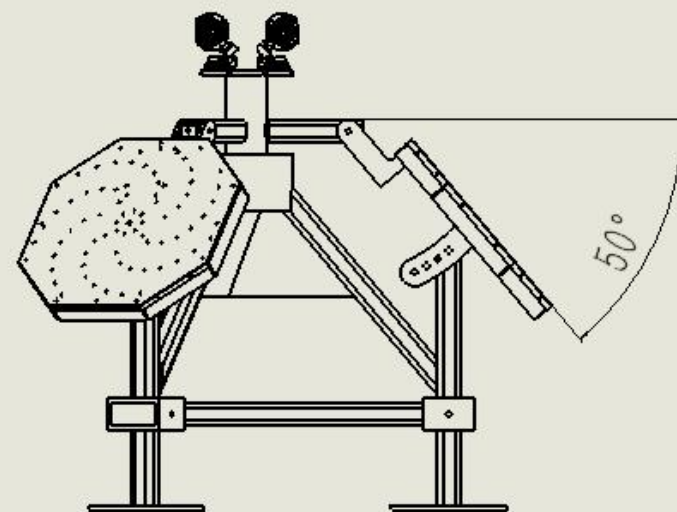


1.三角支撑架 Triangular Frame
全部是焊接一体, All components are integrally welded.

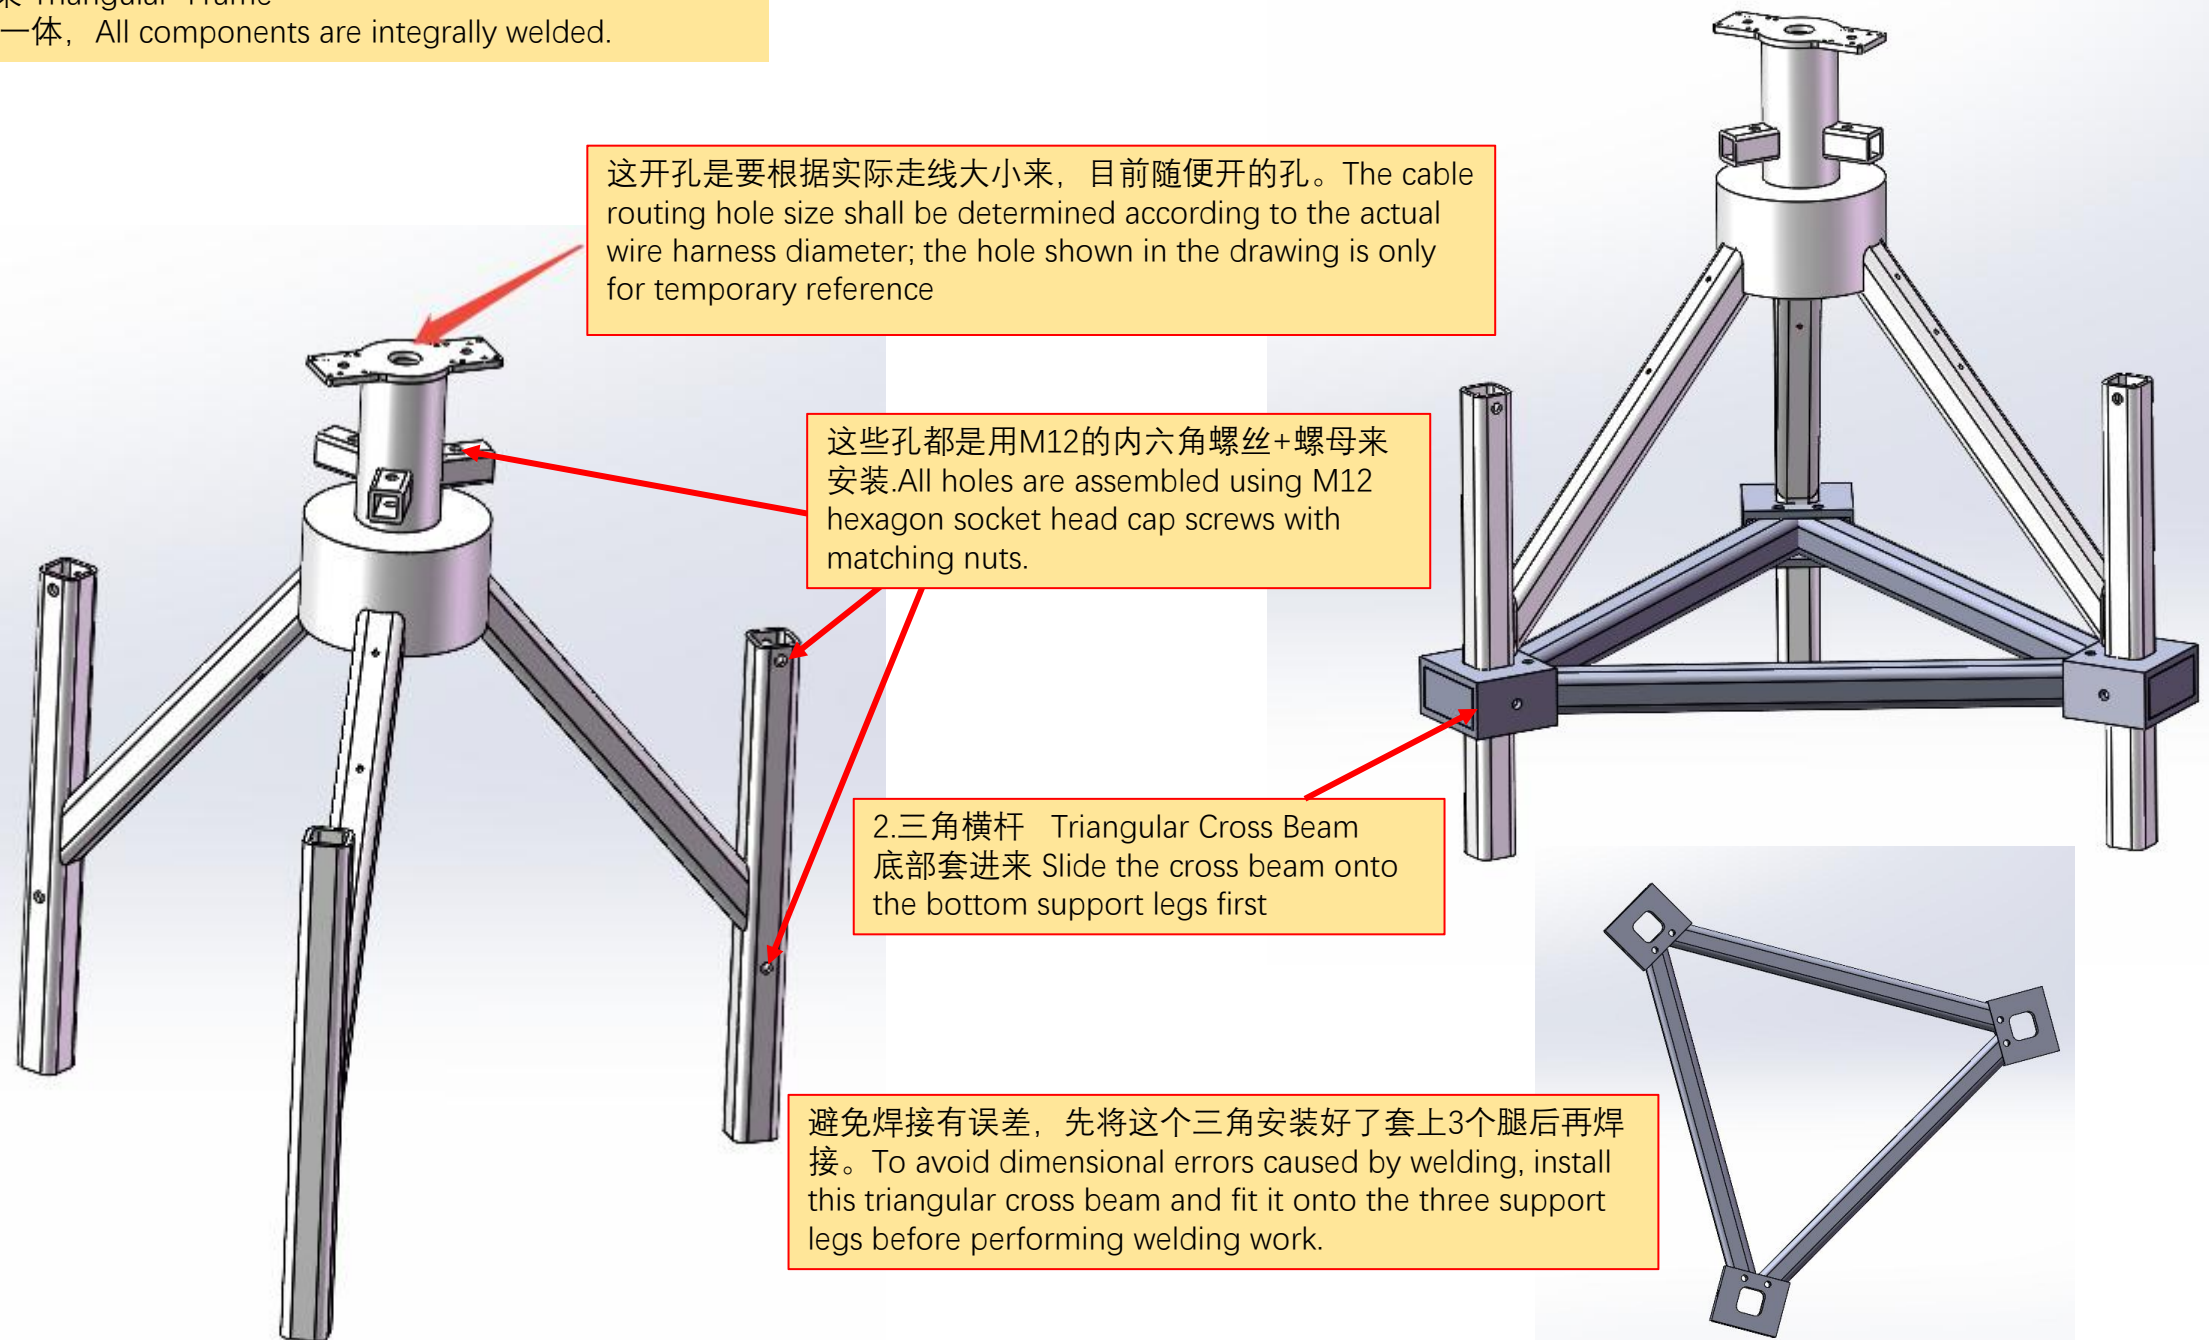


3. 64路大阵列面板安装架 Mounting Bracket for 64-Channel Microphone Array Panel

全部是焊接一体，8边的孔是螺牙孔，M4,底孔3.3mm.用来安装64路大阵列面板 The entire bracket is integrally welded. Holes on the octagonal frame are tapped M4 threaded holes with a pilot hole diameter of 3.3 mm, used for mounting the microphone array panel.

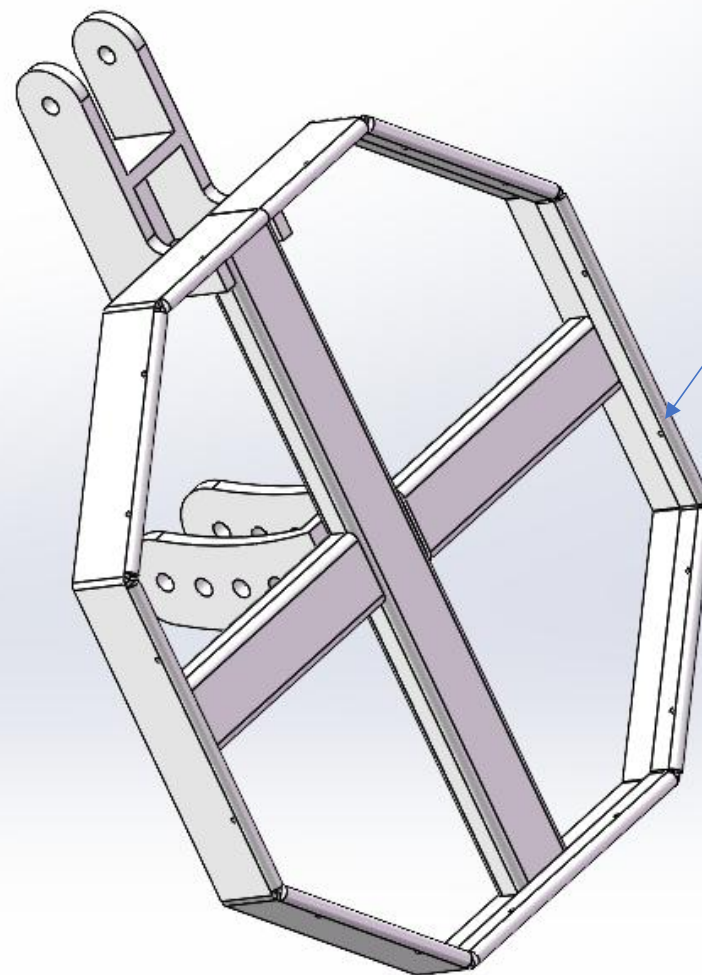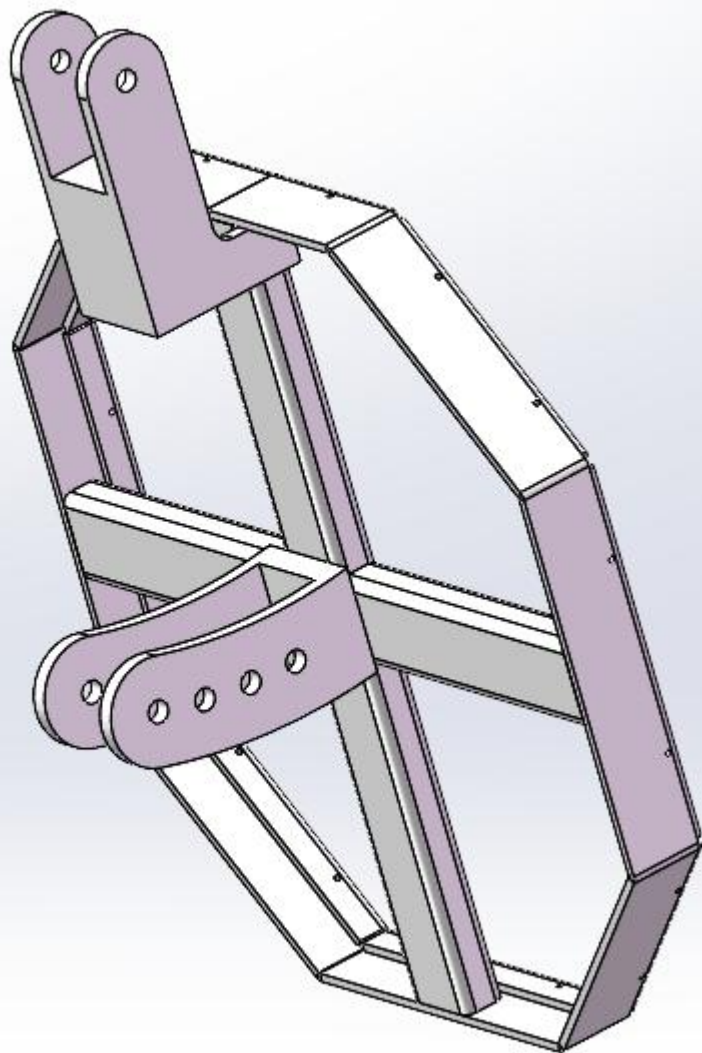


全部采用折弯压平后开孔。如果觉得5mm厚度强度满足要求，可以不用折弯，就5mm开孔攻牙来用。All plates are processed by bending and flattening followed by drilling. If the 5mm-thick plate meets strength requirements, bending can be omitted; 5mm flat plates can be directly drilled and tapped for use.

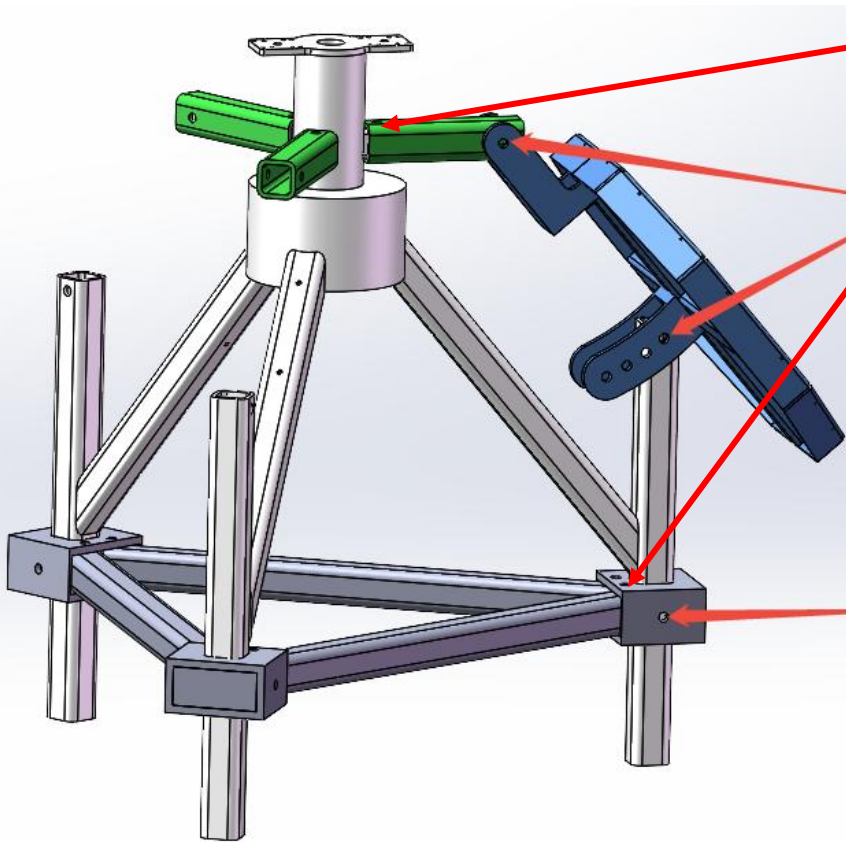

12.9级外六角组合

注：如图参数仅供参考，实际尺寸以实物为准

10毫米=1厘米




厚度: 7.32~7.68毫米

长度: L=90毫米



螺纹直径: 12毫米 (M12)



配 (平垫+弹垫+螺母)

flat washer + spring lock washer + nut

数量
15 sets

1毫米=1mm

12.9级外六角组合

注：如图参数仅供参考，实际尺寸以实物为准

10毫米=1厘米



厚度: 7.32~7.68毫米

长度: L=140毫米



螺纹直径: 12毫米 (M12)



配 (平垫+弹垫+螺母)

数量
3 sets



12.9级外六角组合

注：如图参数仅供参考，实际尺寸以实物为准

10毫米=1厘米



配 (平垫+弹垫+螺母)

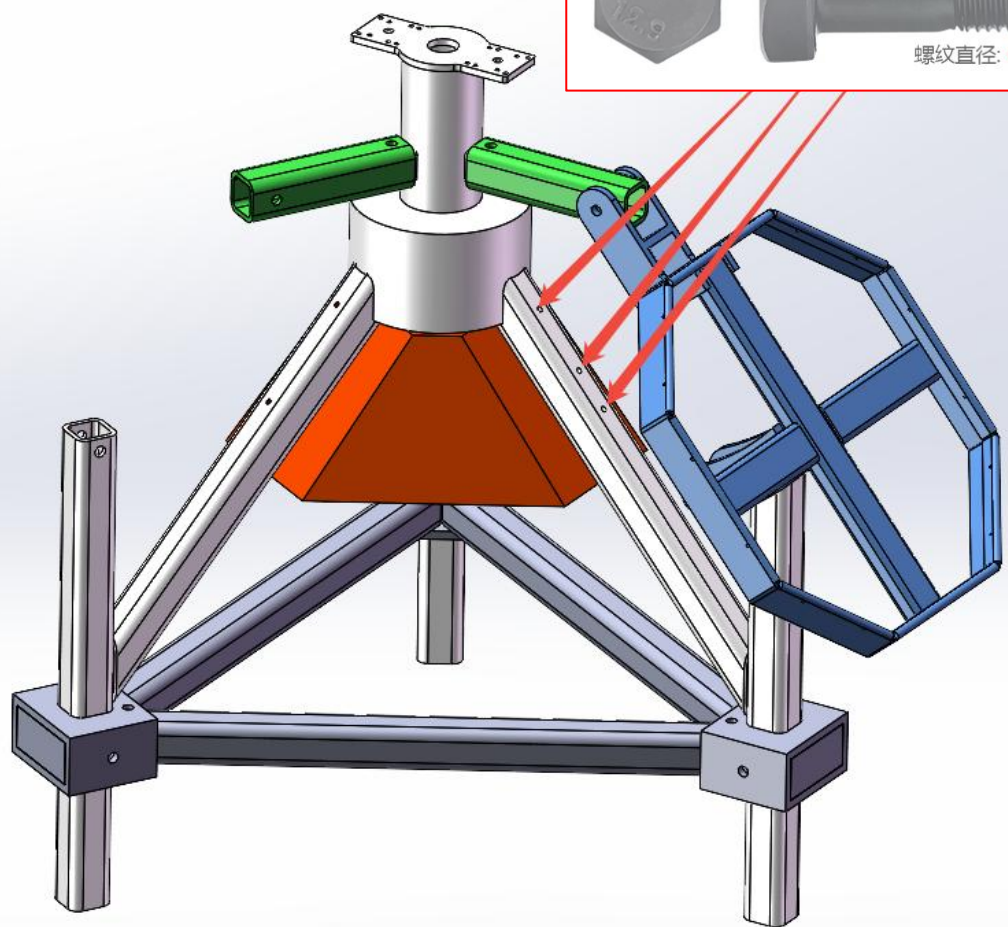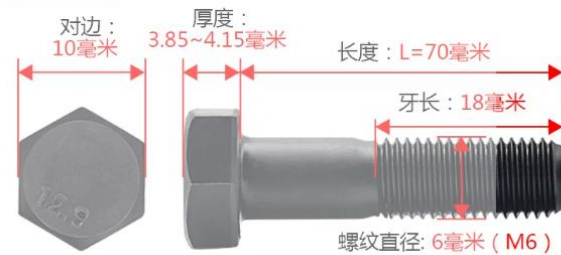

数量 7 sets

1毫米=1mm


12.9级外六角组合

注：如图参数仅供参考，实际尺寸以实物为准


10毫米=1厘米




配 (平垫+弹垫+螺母)

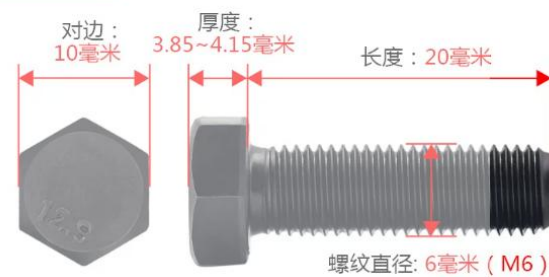


数量 2 sets

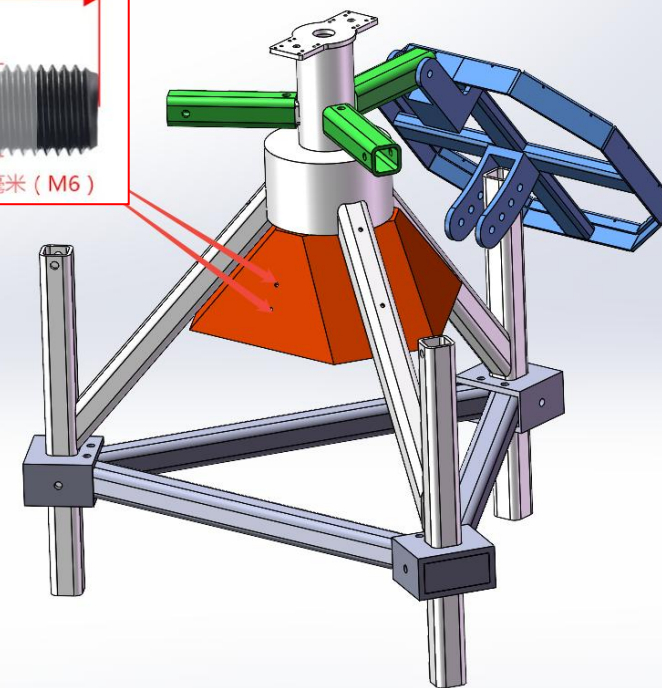

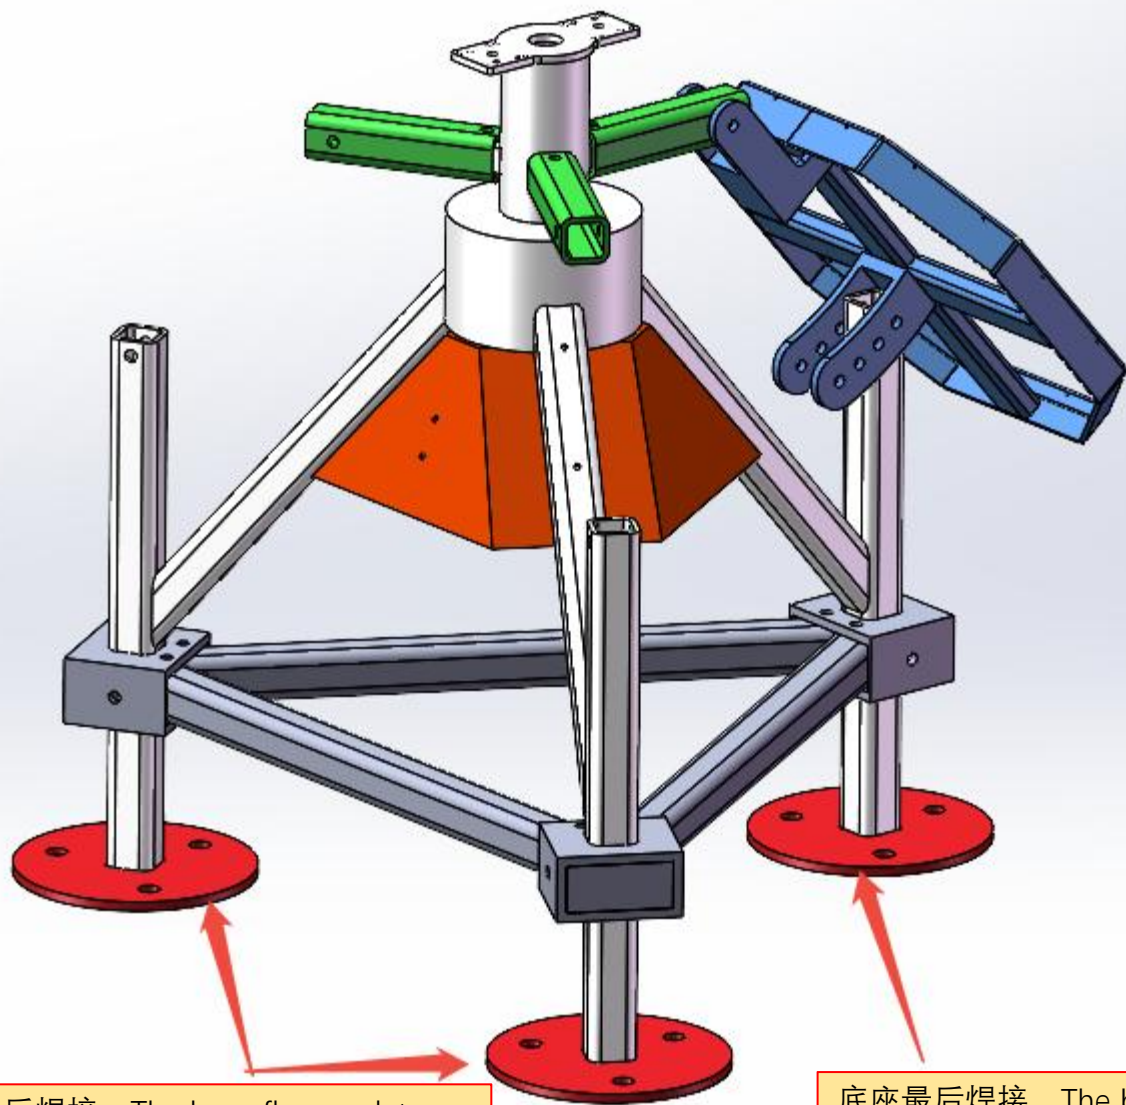

底座最后焊接，The base flange plates shall be welded at the final assembly stage.

底座最后焊接，The base flange plates shall be welded at the final assembly stage.

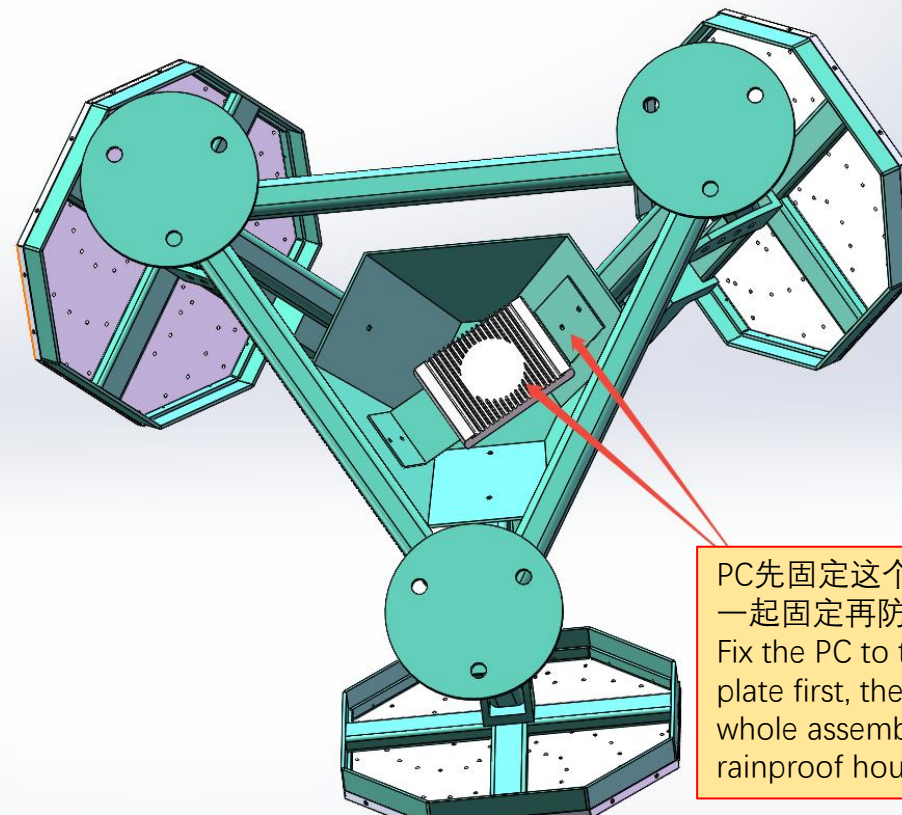

PC先固定这个板上，组后一起固定再防雨盖上面。
Fix the PC to this mounting plate first, then mount the whole assembly onto the rainproof housing cover